

# WHEEL CHOCK

## WC01

Reference: WC01

Size: L 260\*W160 \*H190

Weight: 3 Kg




### Industrial Wheel Chock

OSHA safety regulations require power industrial trucks to be chocked with at least two wheel chocks to prevent the vehicle from rolling whenever it is parked. These heavyweight rubber chocks fit hauler trucks with a load capacity of 40 tons and prevent your truck from rolling or shifting during loading and unloading. Molded from heavy-duty industrial-strength thermoplastic rubber and features a ribbed 37 degree slope to fit the shape of the vehicle tire. Formed with a bottom void for maximum traction on gravel. Includes a large 3-3/4" L x 1-1/4" H easy grip handle for convenient carrying and a 3/8" D pre-drilled fastener hole in the handle

### Features

- Molded from heavy duty industrial strength thermoplastic rubber
- 37 degree ribbed slope conforms to tire shape
- Large 3-3/4" L x 1-1/4" H grip handle
- 3/8" Pre-drilled fastener/tie-down hole in the handle
- \*OSHA requires (2) chocks to prevent vehicle rolling/shifting during loading/unloading

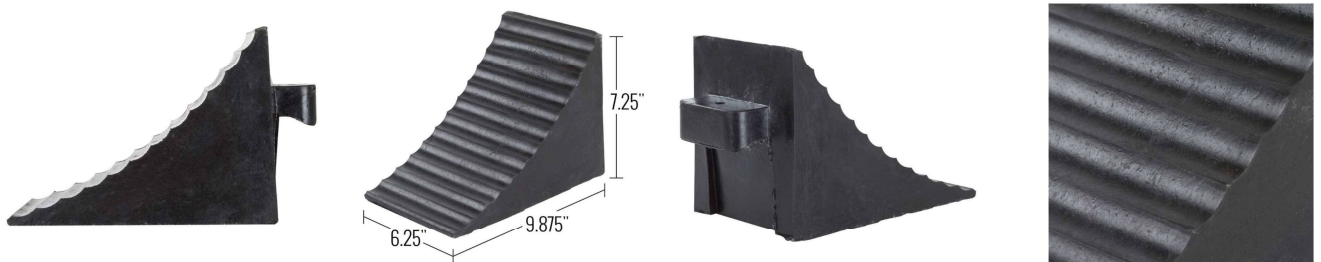

### Loading Capacity

